

Datasheets

Entry ramp for mobile oven rack, model 20-2/1



Article number

60.22.380

Description

With the help of the entry ramp, slopes in the kitchen floor can be compensated for by up to 3 %. Installation is simple and can be carried out retrospectively on iCombi Pro and iCombi Classic.



Intended use

This product is only intended for commercial use, such as in restaurant kitchens or catering operations for schools, hospitals, or delis. Any other use runs counter to its intended purpose, and could be dangerous. Any other use runs counter to its intended purpose, and could be dangerous.

Dimensions and weights




Width (W):	868 mm
Height (H):	86 mm
Depth (D):	1.170 mm
Weight:	15,8 kg

Material

Rust-free stainless steel (CNS 1.4301/AISI 304)

Datasheets

Entry ramp for mobile oven rack, model 20-2/1

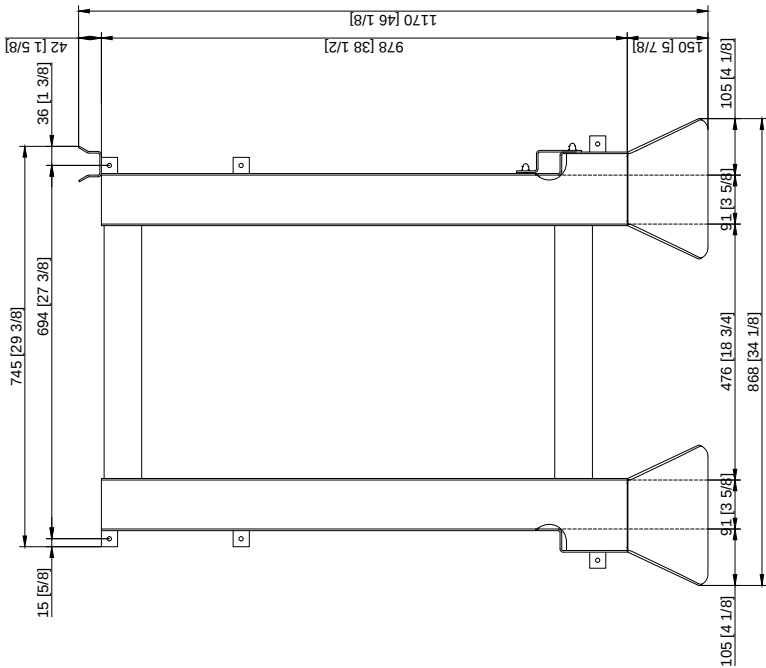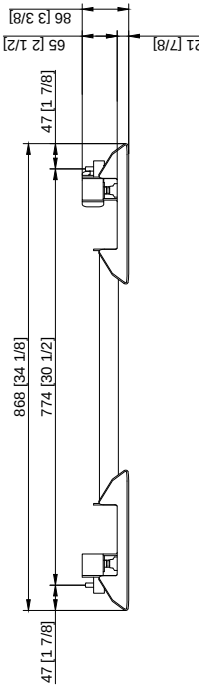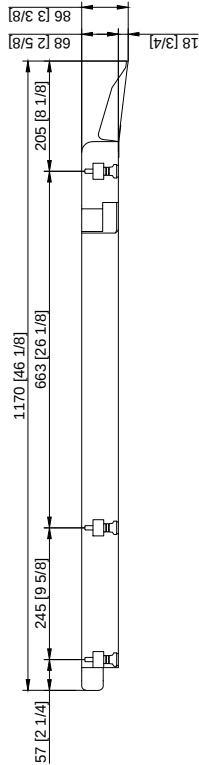

Information/Information/Information		Anschlussplan/Connection diagram/Plan de connexion	
Zachungsdruck unterliegt nicht dem Änderungsdruck unterliegt nicht dem Änderungsdruck!		Ramp for mobile oven rack (CP-20-2)	
Printed drawing is not automatically updated!		(master view)	
Le dessin n'est pas automatiquement mis à jour!			
08/2019		30.05.2019	
RATIONAL AG 2019		RATIONAL AG 2019	
Revisions/Revisions/Revisions		Abmessungen/Dimensions/Dimensions (mm Inch)	
Index		Nr./No. Beschreibung/Description/Description	
1		1	
2		2	
3		3	
4		4	
5		5	
6		6	
7		7	
8		8	