

Specification/Datasheet

Booster transformer, 20-full iCombi gas models



Article number

87.00.741US

Description

The Booster transformer allows installation of an iCombi Pro or Classic 20-full gas models on 120 V receptacles. The Booster is pre-wired for plug and play installation between the 120V receptacle and the iCombi. The iCombi must be set to 240V by trained technician at time of installation / commissioning.



Intended use

This product is intended for professional use, such as in restaurant kitchens or catering operations for schools, hospitals, or delis. Any other use runs counter to its intended purpose and could be dangerous. RATIONAL AG assumes no liability for the consequences of improper use.

Features

- Encapsulated transformer comes with 5' cable with NEMA 5-15 P and 3' cable with NEMA 6-15 R
- Bracket included for mounting to wall. Does not include hardware bolts to secure
- Produces 240V power for 20-full size gas models
- 3.0kVA Single Phase
- One Booster per iCombi required

Technical specifications

Building receptacle:	20 amps
Frequency Rating:	60 Hz
Output voltage:	240 V
Max Temperature Rise:	115 °C
UL Insulation Class:	180 °C
IP Rating:	IP 14
NEMA Enclosure Rating:	3 R

Dimensions and weights

Width (W):	10 1/4 in (259 mm)
Height (H):	10 1/4 in (259 mm)
Depth (D):	7 1/4 in (185 mm)
Weight:	55 lb (24.95 kg)

Material


5' cable 90°C SOOW with NEMA 5-15 P (plug)

3' cable 90°C SOOW with NEMA 6-15 R (receptacle)

Metal bracket for mounting Booster on wall

Specification/Datasheet

Booster transformer, 20-full iCombi gas models

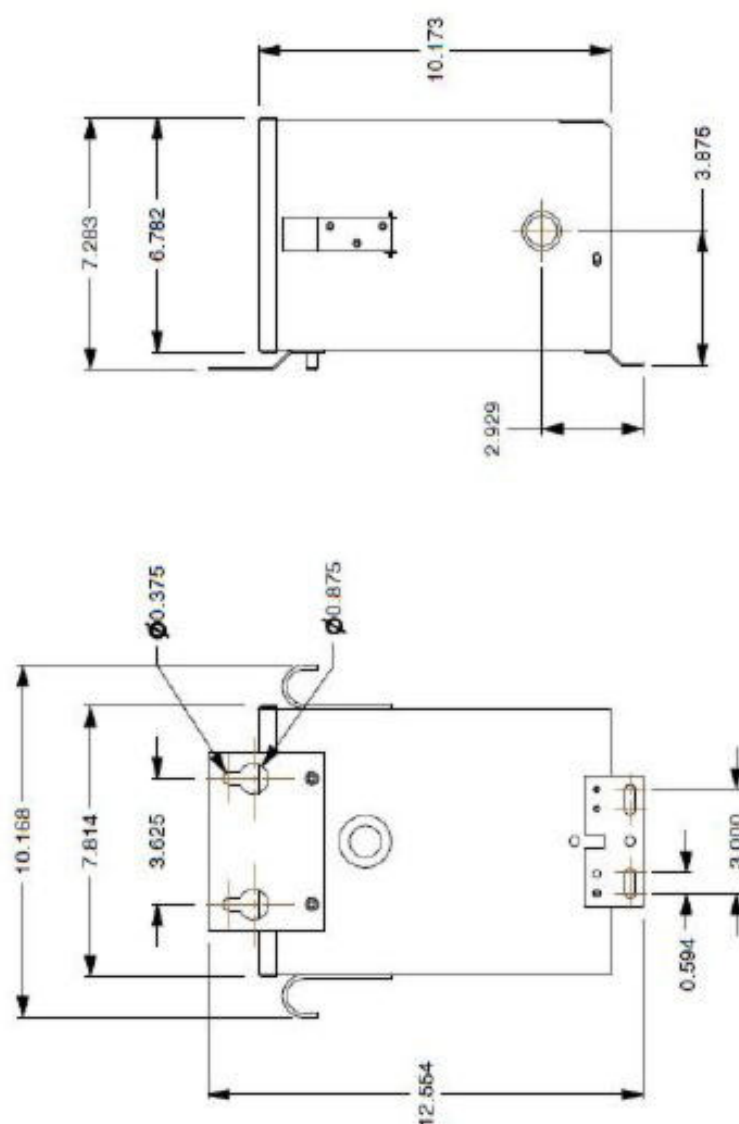

Units: inches

NOTES:

1. DIMENSIONS CAN BE CHANGED BY MANUFACTURER WITHOUT NOTICE.
2. DIMENSIONS DO NOT IMPLY TOLERANCE.